

Technical Specifications StreamLine 40000



Specifications:

• Material	:	SS 316L, according to AISI		
• Internal finish	:	Ra_{max} 0.8 μ m		
• Connections	:	3" BSP DIN2986 PN7		
• Degree of protection	:	IP 54		
• Dimensions H x W x D	:	See layout drawing		
• Weight dry	:	35 kg	-	77 lbs.
• Weight wet	:	60 kg	-	132 lbs.
• Lamp type	:	B80 VIK (one side connected)		
• Number of lamps	:	2		
• Nominal pressure	:	7 bar	-	102 PSI
• Test pressure	:	10 bar (30 minutes)	-	145 PSI


Options:

• Manual cleaning	:	see datasheet Manual Cleaning Mechanism
• UV sensor	:	see datasheet UV-sensor 4S

Customer specified items (CSI):

- Sample taps
- Tri-clamp connection
- 3" NPT connection
- Material SS 316TI

Technical Specifications StreamLine 40000

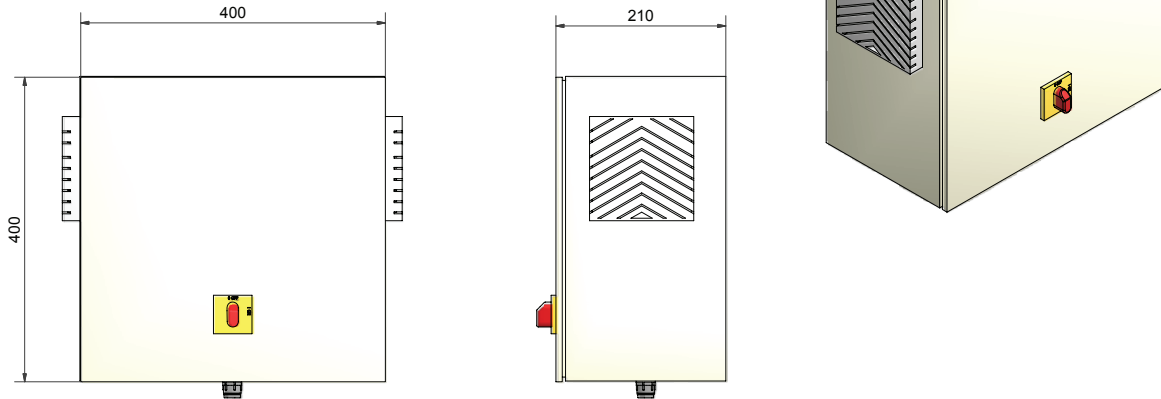

Specifications:

• Material	: Polycarbonate		
• Colour	: Grey		
• Degree of protection	: IP 54		
• Dimensions H x W x D	: 400 x 400 x 210 mm	-	15,7 x 15,7 x 8,3 in.
• Weight	: 4 kg	-	9 lbs.
• Cable Cabinet - Chamber	: 2.5m	-	8.2 ft.

Electric:

• Voltage	: 230V, 1L+N	-	230V 2L
• Frequency	: 50 Hz	-	60 Hz
• Connected power	: 180 W (±10%)		
• StreamLine control system	: Yes (see datasheet StreamLine control system)		

Options:

- Different voltage (check person for available alternatives)

Layout drawing StreamLine 40000

